



## **GOODRIDE Radial ST225/75R15 6H/D ply Gloss BLACK MOD Trailer Wheel Assembly**

D2E9400407-TT : LoadStar ST225/75R15 6H/D ply Gloss BLACK  
MOD HOLE Radial Trailer Wheel Assembly !

[Read More](#)

**SKU:** D2E9400407-TT

**Categories:** [15"](#)

### **Product Description**

- **Tire Specs**
  - **RADIAL**
  - **GOODRIDE RADIAL ST225/75R15 Dply (8 PLY)**
  - H78x15 Alternate Size
  - High Speed Trailer Tire
  - Tubeless Type
  - Radial Ply
  - Load Range D, 2540# capacity
  - S.W: 8.9"
  - O.D: 28.4"
  - Max PSI 65
  - Rim 15x6
  - The GOODRIDE Trailer tire provides a 5 year warranty with the warranty number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
  - Rim Specs
  - 15"x6" Black Mod Hole Steel Rim Powder Coated
  - Bolt Pattern 6 x 5.5"
  - Rim Capacity & PSI 2830# / 80PSI
  - 0 offset
  - 4.27" Pilot Diameter
-



## **GOODRIDE Radial ST235/80R16 Steel BLACK Modular Hole 8H/E Assembly**

ST235/80R16 Steel BLACK Modular Hole 8H/E Assembly

[Read More](#)

**SKU:** D2E9400869-TT

**Categories:** [16"](#)

### **Product Description**

Completely Assembled Unit

Tire: ST235/80R16 Eply mated to a 16"x6" 8 on 6.5" Hole Bolt Pattern BLACK PAINTED Steel Modular Hole Rim, 3500# capacity assembly

#### **Tire Specs:**

- GOODRIDE Radial Tire ST235/80R16 Eply 10PLY
- High Speed Trailer Tire
- Tubeless Type
- Radial Ply
- Load Range E, 3500# capacity
- S.W: 9.4"
- O.D: 30.9"
- Max PSI 90
- Rim  
16x6

- **Rim Specs**
  - 16"x6" BLACK Modular Hole
  - Bolt Pattern 8 x 6.5"
  - Pilot Diameter
  - Rim Capacity & PSI 3750# / 110PSI
  - 0 offset
  - 4.90" Pilot Diameter
-



## Gooseneck 2-5/16" Adjustable Square Bulldog Coupler 25K Capacity

Gooseneck 2-5/16" Adjustable Square Bulldog Coupler 25K Capacity!

[Read More](#)

**SKU:** D2E-HBQ2516ADJ

**Categories:** [Couplers](#)

### Product Description

Brand: Bulldog

Capacity: 25,000lbs

Ball: 2-5/16"

Tube OD: 4.5" Square

Overall Height: 32"

Extended Height: 40"

---



## Gorilla Lift Trailer Ramp Assist

Gorilla Lift Trailer Ramp Assist USA Lower 48 only.

[Read More](#)

**SKU:** GOR2LIFT

**Categories:** [Gorilla Lift Trailer Ramp Assist](#)

### Product Description

#### Product Information:

The Gorilla-Lift is a revolutionary product that takes 100% of the weight off heavy utility trailer tailgates or ramps, allowing you to raise or lower them with virtually no effort — even a couple of fingers. What a great way to feel like Superman and save your back at the same time! Features 2-sided assist and recommended for tailgates 4- to 6-ft. tall with a maximum weight of 300 lbs.

---



## GRAY 5' Vertical Etrack

5GETrackV : GRAY 5' Vertical Etrack

[Read More](#)

**SKU:** 5GETrackV

**Categories:** [E Track](#)

## Product Description

Series E Track

Vertical

**Material:**

High-strength steel; 11 gauge

**Minimum Yield:**

50,000 psi

**Finish:**

Gray, Powder Coat

**Weight:**

6.8 lbs./3.1 kgs.

**Length:**

5.0 ft./1.5 m.



## HAP-158-00 Single Axle Hanger Kit 10K WITH 2-1/2" SPRINGS

Single Axle Hanger Kit 10K WITH 2-1/2" SPRINGS!

[Read More](#)

**SKU:** HAP-158-00

**Categories:** [Axle Hanger Kits](#)

## Product Description

M-PARTS HAP-158-00 Kit

Kit includes 5-1/4" tall front hangers, 4-1/2" tall rear hangers and hardware for mounting springs to the frame of your trailer. Designed for use with 10,000-lb, general-duty Dexter axles. Parts for mounting axle to springs sold separately.

Features:

- Attaches 2 leaf springs (sold separately) to your trailer frame
- Can also be used with HAP-258-01, HAP-258-02 or HAP-258-03 for tandem applications
- Includes:
  - (2) 5-1/4" Tall front hangers with 3/4" bolt holes (28-74-2)
  - (2) 4-1/2" Tall rear hangers (30-61-1)
  - (2) 4-1/2" Long x 3/4" diameter spring-eye bolts (7-264)
  - (2) 3/4" Diameter locknuts (6-113)
- Designed for use on trailers with 10,000-lb, general-duty Dexter axles

- Does not include components for mounting axle to springs

## **M-Parts kit matches HAP-158-00 Dexter Hanger Kit - 2.50" Slipper Springs - 10,000 lbs General Duty**

**Replaces 10GDH-K157**

---



## **HAP-258-01 10K Tandem Equalizer Kit for 2-1/2" Springs, 14-1/4" Equalizer**

10K Tandem Equalizer Kit for 2-1/2" Springs, 14-1/4" Equalizer

[Read More](#)

**SKU:** HAP-258-01

**Categories:** [Axle Hanger Kits](#)

### **Product Description**

- M-Parts HAP-258-01 Kit
  - 10K Tandem Equalizer Kit for 2-1/2" Springs, 14-1/4" Equalizer, Axle spacing 38" using 2-1/2" spring
- This kit is composed of the follow parts:
  - 029-043-02 - Center Hanger (2)
  - 013-108-03 - Equalizer (2) 14-1/4" L
  - 007-169-00 - Spring Eye Bolt (2)
  - 007-095-00 - Keeper Bolt (2)
  - 007-170-00 - Equalizer Bolt (2)
  - 006-046-00 - Locknut (2)
  - 006-072-00 - Locknut (2)

006-112-00 - Locknut (2)

---



## **HAP-258-02 10K Tandem Equalizer Kit for 2-1/2" Springs, 18.5" Equalizer, 42-1/4" Spacing**

10K Tandem Equalizer Kit for 2-1/2" Springs, 18.5" Equalizer

[Read More](#)

**SKU:** HAP-258-02

**Categories:** [Axle Hanger Kits](#)

### **Product Description**

- M-PARTS 10K Tandem Equalizer Kit for 2-1/2" Springs, 18.5" Equalizer for Axle Spacing of 42-1/4"
  - This kit is composed of the following parts:
    - 029-043-02 - Center Hanger (2)
    - 013-108-03 - Equalizer (2) 18.5" L
    - 007-169-00 - Spring Eye Bolt (2)
    - 007-095-00 - Keeper Bolt (2)
    - 007-170-00 - Equalizer Bolt (2)
    - 006-046-00 - Locknut (2)
    - 006-072-00 - Locknut (2)
    - 006-112-00 - Locknut (2)
-



## **HAP-258-03 10K Tandem Equalizer Kit for 2-1/2" Springs, 24-5/8" Equalizer**

10K Tandem Equalizer Kit for 2-1/2" Springs, 24-5/8" Equalizer

[Read More](#)

**SKU:** HAP-258-03

**Categories:** [Axle Hanger Kits](#)

### **Product Description**

M-PARTS HAP-258-03 10K Tandem Equalizer Kit for 2-1/2" Springs, 18.5" Equalizer, 48-1/2" Axle Spacing

- This kit is composed of the follow parts:
    - 029-043-02 - Center Hanger (2)
    - 013-108-03 - Equalizer (2) 24-5/8" L
    - 007-169-00 - Spring Eye Bolt (2)
    - 007-095-00 - Keeper Bolt (2)
    - 007-170-00 - Equalizer Bolt (2)
    - 006-046-00 - Locknut (2)
    - 006-072-00 - Locknut (2)
    - 006-112-00 - Locknut (2)
-



## Harley Davidson Decal

HD-1 : Harley Davidson Decal FREE SHIPPING TO THE LOWER 48 US STATES ONLY. CONTACT US FOR INTERNATIONAL SHIPPING. 912 367 3007 EXT 310


[Read More](#)

SKU: HD-1

Categories: [Decals](#)

## Product Description

*Huge Harley Decal and will make your trailer look AWESOME!!*

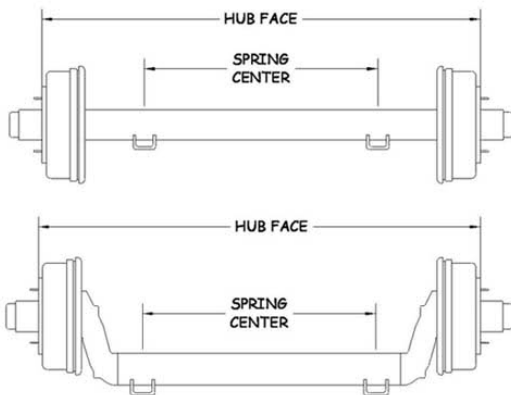

## How to Measure Axles

[Read More](#)

SKU: AxleMeasure

Categories: [How to Measure Axles](#)

## Product Description

Axles are measured based on Outer Hub Face Distance and Spring Center Dimensions. Please reference the images to ensure accuracy of concepts.

Axles can be Drop, Straight, or Cambered Beams.

Beams can be made of square, round or rectangle tubing.

Torsion Axles will not have springs, but will have an arm that sticks out. The suspension is inside the axle.

Make sure you measure your bolt pattern on 5Lug Axles as there are many different sizes. Most common is 5on4.5", which will measure 2-5/8" from Lug1Center to Lug2 Center.



## Hydraulic Pump for dump trailers

Down To Earth Trailers OEM hydraulic pump for dump trailers

[Read More](#)

**SKU:** DC45577

**Categories:** [Pumps](#)

### Product Description

Brand: KTI

Model: DC4698

PSI 3200

Relief PSI 3200

Amps 248

Complete assembly includes motor, tank, starter, controller already assembled ready for installation.

This is a Power UP and Power DOWN.



## Jammy ID Light Bar LED 3 Diode

ID Light Bar LED 3 Diode

[Read More](#)

**SKU:** S51RR001-1

**Categories:** [Lights & Electrical Accessories](#)

### Product Description

Brand : Jammy

Color : RED LED

Number of Diodes : 3

Size : 14-7/8" inch

Mounting Holes are on 6" Centers +or- .125"

---



## Jammy ID Light Bar LED 9 Diode

ID Light Bar LED 6 Diode

[Read More](#)

**SKU:** J-5695-R

**Categories:** [Lights & Electrical Accessories](#)

## Product Description

Brand : Jammy

Color : RED

Number of Diodes : 6

Size : 15.5" inch

Mounting Holes are on 6" Centers +or- .125"

---



## JAMMY Replacement Light for ID Bar

Replacement Light for ID Light Bar LED 2 Diode

[Read More](#)

**SKU:** J-IDBarLens

**Categories:** [Lights & Electrical Accessories](#)

## Product Description

Brand : JAMMY

Color : RED

Number of Diodes : 2

Size : 2.5" inch

Mounting Holes are Plug In

This is the removable / replaceable Red Lights on the ID Bar

Began Late 2016 on D2E Trailers



## KENDA LIGHT TRUCK K391M Tire 7.00-15 LT

CHOOSE TIRE SIZE AND LOAD RANGE FROM DROP DOWN LIST

[Read More](#)

SKU: KENDA LIGHT TRUCK K391M Tire 7.00-15 LT

Categories: [15"](#)

## Product Description

- **TIRE SPEC OPTIONS:**

- **KENDA LIGHT TRUCK K391M 7.00-15 C PLY (6 PLY)**

- High Speed Trailer Tire
- Tubeless Type
- Bias Ply
- Load Range C, 1852 lbs
- S.W: 7.7"
- O.D: 29.3"
- Max PSI 46
- Rim 15x5.5
- The LoadStar Trailer tire provides a 2 year warranty with the warranty number imprinted on each tire.
- These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.

- **KENDA LIGHT TRUCK K391M 7.00-15 D PLY (8 PLY)**

- High Speed Trailer Tire
  - Tubeless Type
  - Bias Ply
  - Load Range D, 2156 lbs
  - S.W: 7.7"
  - O.D: 29.3"
  - Max PSI 60
  - Rim 15x5.5
  - The LoadStar Trailer tire provides a 2 year warranty with the warranty number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
- **KENDA LIGHT TRUCK K391M 7.00-15 E PLY (10 PLY)**
- High Speed Trailer Tire
  - Tubeless Type
  - Bias Ply
  - Load Range E, 2376 lbs
  - S.W: 7.7"
  - O.D: 29.3"
  - Max PSI 70
  - Rim 15x5.5
  - The LoadStar Trailer tire provides a 2 year warranty with the warranty number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
- 



## **KENDA LOADSTAR K550 BIAS ST205/75D15 TRAILER TIRE**

CHOOSE TIRE SIZE AND LOAD RANGE FROM DROP DOWN LIST

[Read More](#)

**SKU:** KENDA LOADSTAR K550 BIAS ST205/75D15

**Categories:** [15"](#)

### **Product Description**

- **TIRE SPEC OPTIONS:**

- **LoadStar K550 ST205/75D15 B ply (4 ply)**

- F78x15 Alternate Size
- High Speed Trailer Tire
- Tubeless Type
- Load Range B, 1480# capacity
- Sidewall 7.6"
- O.D. 26.7"
- Max PSI 35
- Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
- The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
- These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.

•

- **LoadStar K550 ST205/75D15 C ply (6 ply)**

- F78x15 Alternate Size
- High Speed Trailer Tire
- Tubeless Type
- Load Range C, 1820# capacity
- Sidewall 7.8"
- O.D. 27.4"
- Max PSI 50
- Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
- The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
- These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
- Down To Earth Factory OEM Tire.

•

- **LoadStar K550 ST205/75D15 D ply (8 ply)**

- F78x15 Alternate Size
  - High Speed Trailer Tire
  - Tubeless Type
  - Load Range D, 2150# capacity
  - Sidewall 7.8"
  - O.D. 27.4"
  - Max PSI 65
  - Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
  - The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
-



## **KENDA LOADSTAR K550 BIAS ST225/75D15 TRAILER TIRE**

CHOOSE TIRE SIZE AND LOAD RANGE FROM DROP DOWN LIST

[Read More](#)

**SKU:** KENDA LOADSTAR K550 BIAS ST225/75D15

**Categories:** [15"](#)

### **Product Description**

- **TIRE SPEC OPTIONS:**

- **KENDA LOADSTAR K550 ST225/75D15 Cply**

- H78x15 Alternate Size
- High Speed Trailer Tire
- Tubeless Type
- Bias Ply
- Load Range C, 2150# capacity
- S.W: 8.4"
- O.D: 28.1"
- Max PSI 50
- Rim 15x6
- The LoadStar Trailer tire provides a 2 year warranty with the warranty number imprinted on each tire.
- These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.

- **KENDA LOADSTAR K550 ST225/75D15 Dply**

- H78x15 Alternate Size
- High Speed Trailer Tire
- Tubeless Type
- Bias Ply
- Load Range D, 2540# capacity
- S.W: 8.4"
- O.D: 28.1"
- Max PSI 65
- Rim 15x6
- The LoadStar Trailer tire provides a 2 year warranty with the warranty number imprinted on each tire.
- These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.



## **KENDA LOADSTAR K550 ST205/75D15 Aluminum 5 Star Wheel / Tire Assembly 5H x 4.5" BP**

15" Aluminum 5 Star Wheel / Tire Assembly 5H x 4.5" BP !

[Read More](#)

**SKU:** D2E3S649

**Categories:** [15"](#)

### **Product Description**

- Tire Specs
  - KENDA LOADSTAR K550 ST205/75D15 C ply (6 ply)
  - F78x15 Alternate Size
  - High Speed Trailer Tire
  - Tubeless Type
  - Load Range C, 1820# capacity
  - Sidewall 7.8"
  - O.D. 27.4"
  - Max PSI 50
  - Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
  - The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
  - Down To Earth Factory OEM Tire.
    - Rim Specs:
  - - 15"x6" 1 Piece Aluminum
    - Clear Coated Rim
    - Bolt Pattern 5 x 4.5"
    - Pilot Diameter 3.19"
    - Rim Capacity 2150#
    - 0 offset
-



## **KENDA LOADSTAR K550 ST205/75D15 Aluminum 7 Star Wheel / Tire Assembly 5H x 4.5" BP**

15" Aluminum 7 Star Wheel / Tire Assembly 5H x 4.5" BP

[Read More](#)

**SKU:** D2E3S264

**Categories:** [15"](#)

### **Product Description**

- Tire Specs
- KENDA LOADSTAR K550 ST205/75D15 C ply (6 ply)
- F78x15 Alternate Size
- High Speed Trailer Tire
- Tubeless Type
- Load Range C, 1820# capacity
- Sidewall 7.8"
- O.D. 27.4"
- Max PSI 50
- Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
- The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
- These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
- Down To Earth Factory OEM Tire.
  - Rim Specs:
    - 15"x6" 1 Piece Aluminum
    - Clear Coated Rim
    - Bolt Pattern 5 x 4.5"
    - Pilot Diameter 3.19"
    - Rim Capacity 2150#
    - 0 offset



## **KENDA LOADSTAR K550 ST205/75D15 Aluminum Split Spoke Wheel / Tire Assembly 5H x 4.5" BP**

15" Aluminum Split Spoke Wheel / Tire Assembly 5H x 4.5" BP

[Read More](#)

**SKU:** D2E3S740HWT

**Categories:** [15"](#)

### **Product Description**

- Tire Specs
- KENDA LOADSTAR K550 ST205/75D15 C ply (6 ply)
- F78x15 Alternate Size
- High Speed Trailer Tire
- Tubeless Type
- Load Range C, 1820# capacity
- Sidewall 7.8"
- O.D. 27.4"
- Max PSI 50
- Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
- The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
- These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
- Down To Earth Factory OEM Tire.
  - Rim Specs:
    - 15"x6" 1 Piece Aluminum
    - Clear Coated Rim
    - Bolt Pattern 5 x 4.5"
    - Pilot Diameter 3.19"
    - Rim Capacity 2150#
    - 0 offset



## **KENDA LOADSTAR K550 ST205/75D15 5Hon4.5"/C ply MODULAR HOLE ALUMINUM Trailer Wheel Assembly**

D2E3S644 : LoadStar K550 Bias ST205/75D15 5Hon4.5"/C ply  
MODULAR HOLE ALUMINUM Trailer Wheel Assembly

[Read More](#)

**SKU:** D2E3S644

**Categories:** [15"](#)


### **Product Description**

- **Tire Specs:**

- KENDA LOADSTAR K550 ST205/75D15 C ply (6 ply)
- F78x15 Alternate Size
- High Speed Trailer Tire
- Tubeless Type
- Load Range C, 1820# capacity
- Sidewall 7.6"
- O.D. 27.4"
- Max PSI 50
- Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
- The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
- These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
- Down To Earth Factory OEM Tire.

- **Rim Specs:**

- 15"x6" 1 Piece Aluminum MOD HOLE
- Clear Coated Rim
- Bolt Pattern 5 x 4.5"
- Pilot Diameter 3.19"
- Rim Capacity 2150#
- 0 offset

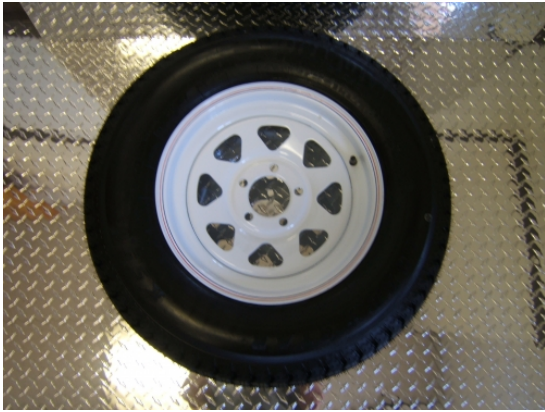

## **KENDA LOADSTAR K550 ST205/75D15 5Hon5"/C ply White Spoke Trailer Wheel Assembly**

LoadStar K550 ST205/75D15 Cply mounted to 15"x5" White Spoke Rim featuring 5 on 5" Bolt Pattern.

[Read More](#)

**SKU:** D2E3S638

**Categories:** [15"](#)

### **Product Description**

- KENDA LOADSTAR K550 ST205/75D15 C ply (6 ply)
  - F78x15 Alternate Size
  - High Speed Trailer Tire
  - Tubeless Type
  - Load Range C, 1820# capacity
  - Sidewall 7.8"
  - O.D. 27.4"
  - Max PSI 50
  - Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
  - The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
  - Down To Earth Factory OEM Tire.
  
  - Rim Specs
  - 15"x5" White Spoke Steel Rim Powder Coated w/ Red/Blue Pinstripe &
  - Bolt Pattern 5 x 5"
  - Rim Capacity & PSI 1820# / 50PSI
  - 0 offset
  - 3.19" Pilot Diameter
-



## **KENDA LOADSTAR K550 ST205/75D15 BLACK Spoke 5Hx4.5/C Assembly**

KENDA LOADSTAR K550 ST205/75D15 BLACK Spoke 5Hx4.5/C  
Assembly

[Read More](#)

**SKU:** D2E3S651

**Categories:** [15"](#)

### **Product Description**

- Tire Specs
  - KENDA LOADSTAR K550 ST205/75D15 C ply (6 ply)
  - F78x15 Alternate Size
  - High Speed Trailer Tire
  - Tubeless Type
  - Load Range C, 1820# capacity
  - Sidewall 7.8"
  - O.D. 27.4"
  - Max PSI 50
  - Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
  - The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
  - Down To Earth Factory OEM Tire.
- 
- Rim Specs
  - 15"x5" BLACK Spoke Steel Rim, Powder Coated
  - Bolt Pattern 5 x 4.5"
  - Rim Capacity & PSI 1820# / 50PSI
  - 0 offset
  - 3.19" Pilot Diameter
-



## **KENDA LOADSTAR K550 ST205/75D15 Galvanized Trailer Wheel / Tire Assembly 5H x 4.5" Cply**

15" Galvanized Trailer Wheel / Tire Assembly 5H x 4.5" Cply

[Read More](#)

**SKU:** D2E3S650

**Categories:** [15"](#)

### **Product Description**

- Tire Specs
  - KENDA LOADSTAR K550 ST205/75D15 C ply (6 ply)
  - F78x15 Alternate Size
  - High Speed Trailer Tire
  - Tubeless Type
  - Load Range C, 1820# capacity
  - Sidewall 7.8"
  - O.D. 27.4"
  - Max PSI 65
  - Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
  - The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
  - Down To Earth Factory OEM Tire.
  
  - Rim Specs
  - 15"x6" Galvanized Spoke Steel Rim
  - Rim Capacity & PSI 2050# @ 75 PSI
  - 0 offset
  - 3.19" Pilot Diameter
-



## **KENDA LOADSTAR K550 ST205/75D15 Silver Mod 5Hon5" /C Assembly**

D2E32253 : Loadstar K550 ST205/75D15 Silver Mod 5Hon5"/C  
Assembly

[Read More](#)

**SKU:** D2E32253

**Categories:** [15"](#)

### **Product Description**

- Tire Specs
  - KENDA LOADSTAR K550 ST205/75D15 C ply (6 ply)
  - F78x15 Alternate Size
  - High Speed Trailer Tire
  - Tubeless Type
  - Load Range C, 1820# capacity
  - Sidewall 7.8"
  - O.D. 27.4"
  - Max PSI 50
  - Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
  - The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
  - Down To Earth Factory OEM Tire.
- 
- Rim Specs
  - 15"x5" Silver Modular Hole Steel Rim, Powder Coated
  - Bolt Pattern 5 x 5"
  - Rim Capacity & PSI 1820# / 50PSI
  - 0 offset
  - 3.19" Pilot Diameter
-



## **KENDA LOADSTAR K550 ST205/75D15 Silver Mod 5Hx4.5/C Assembly**

D2E3S636 : Loadstar K550 ST205/75D15 Silver Mod 5Hx4.5/C  
Assembly

[Read More](#)

**SKU:** D2E3S636

**Categories:** [15"](#)

### **Product Description**

- Tire Specs
  - KENDA LOADSTAR K550 ST205/75D15 C ply (6 ply)
  - F78x15 Alternate Size
  - High Speed Trailer Tire
  - Tubeless Type
  - Load Range C, 1820# capacity
  - Sidewall 7.8"
  - O.D. 27.4"
  - Max PSI 50
  - Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
  - The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
  - Down To Earth Factory OEM Tire.
- 
- Rim Specs
  - 15"x5" Silver Modular Hole Steel Rim, Powder Coated
  - Bolt Pattern 5 x 4.5"
  - Rim Capacity & PSI 1820# / 50PSI
  - 0 offset
  - 3.19" Pilot Diameter
-



## **KENDA LOADSTAR K550 ST205/75D15 White Mod 5Hx4.5/C Assembly**

D2E3S636 : Loadstar K550 ST205/75D15 White Mod 5Hx4.5/C  
Assembly

[Read More](#)

**SKU:** D2E3S645

**Categories:** [15"](#)

### **Product Description**

- Tire Specs
  - KENDA LOADSTAR K550 ST205/75D15 C ply (6 ply)
  - F78x15 Alternate Size
  - High Speed Trailer Tire
  - Tubeless Type
  - Load Range C, 1820# capacity
  - Sidewall 7.8"
  - O.D. 27.4"
  - Max PSI 50
  - Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
  - The LoadStar Trailer tire provides a 2 year warranty with the warranty Phone number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
  - Down To Earth Factory OEM Tire.
- 
- Rim Specs
  - 15"x5" White Modular Hole Steel Rim, Powder Coated
  - Bolt Pattern 5 x 4.5"
  - Rim Capacity & PSI 1820# / 50PSI

- 0 offset
  - 3.19" Pilot Diameter
- 



## **KENDA LOADSTAR K550 ST225/75D15 6Hon5.5"/D ply FIVE STAR ALUMINUM Trailer Wheel Assembly**

D2E3S913 : LoadStar K550 Bias ST225/75D15 6Hon5.5"/D ply  
FIVE STAR ALUMINUM Trailer Wheel Assembly

[Read More](#)

**SKU:** D2E3S913

**Categories:** [15"](#)

### **Product Description**

- **TIRE SPECS:**
- KENDA LOADSTAR K550 ST225/75D15 Dply
- H78x15 Alternate Size
- High Speed Trailer Tire
- Tubeless Type
- Bias Ply
- Load Range D, 2540# capacity
- S.W: 8.4"
- O.D: 28.1"
- Max PSI 65
- Rim 15x6
- The LoadStar Trailer tire provides a 2 year warranty with the warranty number imprinted on each tire.
- These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.
- **RIM SPECS:**
- 15"x6" 1 Piece Aluminum
- Clear Coated Rim
- Bolt Pattern 6 x 5.5"
- Pilot Diameter 4.25"
- Rim Capacity 2830#
- 0 offset



## **KENDA LOADSTAR K550 ST225/75D15 BLACK Spoke 6Hx5.5/D Assembly**

KENDA LOADSTAR K550 ST225/75D15 BLACK Spoke 6Hx5.5/D  
Assembly !

[Read More](#)

**SKU:** D2E3S878

**Categories:** [15"](#)

### **Product Description**

- Tire Specs
- KENDA LOADSTAR K550
- ST225/75D15 Dply
- Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
- H78x15 Alternate Size
- High Speed Trailer Tire
- Tubeless Type
- Bias Ply
- Load Range D, 2540# capacity
- S.W: 8.4"
- O.D: 28.1"
- Max PSI 65
- Rim 15x6
- The LoadStar Trailer tire provides a 2 year warranty with the warranty number imprinted on each tire.
- These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements. Down To Earth Factory OEM Tire.

- Rim Specs
  - 15"x6" BLACK Spoke Steel Rim Powder Coated
  - Bolt Pattern 6 x 5.5"
  - Rim Capacity & PSI 2830# / 80PSI
  - 0 offset
  - 4.27" Pilot Diameter
-



## **KENDA LOADSTAR K550 ST225/75D15 Silver Modular Hole 6Hx5.5/D Assembly**

KENDA LOADSTAR K550 ST225/75D15 SilverModular Hole  
6Hx5.5/D Assembly

[Read More](#)

**SKU:** D2E3S918

**Categories:** [15"](#)

### **Product Description**

- Tire Specs
  - KENDA LOADSTAR K550
  - ST225/75D15 Dply
  - Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
  - H78x15 Alternate Size
  - High Speed Trailer Tire
  - Tubeless Type
  - Bias Ply
  - Load Range D, 2540# capacity
  - S.W: 8.4"
  - O.D: 28.1"
  - Max PSI 65
  - Rim 15x6
  - The LoadStar Trailer tire provides a 2 year warranty with the warranty number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements.Down To Earth Factory OEM Tire.
- 
- Rim Specs
  - 15"x6" Silver Modular Hole Steel Rim, Powder Coated
  - Bolt Pattern 6 x 5.5"
  - Rim Capacity & PSI 2830# / 80PSI
  - 0 offset
  - 4.27" Pilot Diameter
-



## **KENDA LOADSTAR K550 ST225/75D15 White Spoke 5Hx4.5/D Assembly**

KENDA LOADSTAR K550 ST225/75D15 White Spoke 5Hx4.5/D  
Assembly Free Shipping

[Read More](#)

**SKU:** D2E3S862

**Categories:** [15"](#)

### **Product Description**

- Tire Specs
  - KENDA LOADSTAR K550
  - ST225/75D15 Dply
  - Nylon Bias Ply Constructed Tire for Durability and Bruise Resistance.
  - H78x15 Alternate Size
  - High Speed Trailer Tire
  - Tubeless Type
  - Bias Ply
  - Load Range D, 2540# capacity
  - S.W: 8.4"
  - O.D: 28.1"
  - Max PSI 65
  - Rim 15x6
  - The LoadStar Trailer tire provides a 2 year warranty with the warranty number imprinted on each tire.
  - These tires provide: Longer Wear, Better Towing Stability, Reduced Rolling Resistance and meets all US Dept of Transportation requirements. Down To Earth Factory OEM Tire.
- 
- Rim Specs
  - 15"x6" White Spoke Steel Rim Powder Coated w/ Red/Blue Pinstripe &
  - Bolt Pattern 5 x 4.5"
  - Rim Capacity & PSI 2050# / 75 PSI
  - 0 offset
  - 3.19" Pilot Diameter
-